


## G2000|G3000

### LIGHT INDUSTRIAL BARCODE LABEL PRINTER




RUGGED  
PARTS  
DURABLE  
MACHINES  
RELIABILITY  
& DURABILITY

Printhead pressure  
adjustment  
plus ribbon's peeling  
time control



Easy adjustment  
of ribbon tension



Left & Right  
structured  
Industrial level  
performance



National patented  
"Convective Heat  
Transfer"



### ENJOY A DESKTOP FOOTPRINT WITH INDUSTRIAL FEATURES AND PERFORMANCE

The optimized design of the printhead module, the innovative left-right structure and the patented convective heat transfer forge a highly reliable G series printer that is capable of handling wide ranges of consumables and heavy-duty printing work.

The G series printer carries all the advantages of conventional industrial label printers with added advantage of significant space and cost savings.

### BENEFITS

The optimized structural design of the printhead module allows easy adjustment of printhead pressure and accurate time control of ribbon's peeling at TPH. Thus the new G series printer is accomplished with strong compatibility between wide ranges of consumables and exceptional print quality, as well as reduced maintenance cost and enhanced cost-effectiveness.

The easy-operating assembly of ribbon tension adjustment ensures steady and reliable work performance.

With a 4-line graphical LCD display, all printer status is clearly demonstrated during standalone printing.

One-piece chassis, strengthened in every side, providing high quality and reliability. Left & Right structure design, completely separate the central control system from the operational area, making it much easier to operate and maintain.

National patented "Convective Heat Transfer" technology always ensures a cool working temperature, even when printing 7x24.

All rotating parts are supported by ball bearings or fixed bearings, thereby eliminating wear caused from direct contact with plastic.


## SPECIFICATIONS

Model	G2000	G3000
Printing Method	Thermal Transfer	
Printing Resolution	203 dpi	300 dpi
Max Printing Speed	6 ips (153 mm/s)	4 ips (101.6 mm/s)
Max Printing Width	4.25" (108 mm)	4.17" (106 mm)
Max Printing Length	315" (8000 mm)	157" (4000 mm)
Memory	8 MB FLASH ROM, 16 MB SDRAM	
Media	Roll-feed, die-cut, continuous, fan-fold, tags, tickets in plain paper or thermal paper, Width: 4.3" (110 mm)max., 0.98" (25 mm)min. Supply roll: OD 6" (152 mm) max., ID 1" (25.4 mm) min. Thickness: 0.003" ~ 0.008" (0.08 ~ 0.20 mm), including liner	
Ribbon	Wax, Wax/Resin, Resin Ribbon roll: OD 2.75" (70 mm) max., ID 1" (25.4 mm) core Max width: 4.3" (110 mm); Max length: 984.25' (300 m), Ink side: Out	
Fonts	Five built-in ASCII fonts, Downloadable truetype fonts.	
Bar Code Types	1D Barcode : Code 39, Code 93, Code 128/subset A,B,C, Codabar, Interleave 2 of 5, UPC A/E 2 and 5 add-on, EAN-13/8/128, UCC-128, etc. 2D Barcode : MaxiCode, PDF417, Data Matrix, QR, etc.	
Media Sensor	Reflective (Adjustable) / Transmissive	
Interfaces	RS-232 Serial, 10/100 M-bit Ethernet, USB DEVICE 2.0, USB HOST, Centronics Parallel (Optional)	
Power Rating	24 VDC, 4.0 A	
Weight	3.5 kgs	
Dimensions	W 10.07" (256 mm) x D 12.95" (329 mm) x H 7.8" (200 mm)	
Operating Environment	Temperature: 32°F ~ +104°F (0°C ~ 40°C), Relative humidity: 5% ~ 85% non condensing	
Storage Environment	Temperature: -40°F ~ +140°F (-40°C ~ 60°C) Relative humidity: 5% ~ 85% non condensing	
Optional Items	Peeler, External Rewinder, External Media Stand, Rotary Cutter, Centronics Parallel and Media Guide Adapter	



\* All specifications are subject to change without notice.

## APPLICATIONS

Electronics  
Textiles  
Consumer Products  
Bag Tag  
Medical Record Labeling  
...

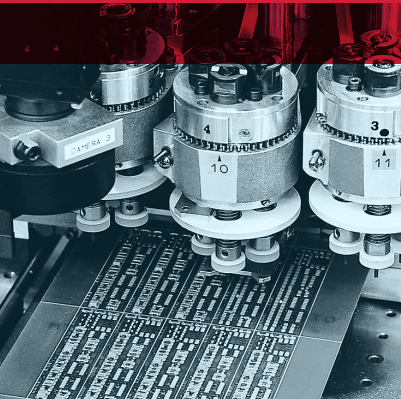

## SAMPLES



# POSTEK

POSTEK ELECTRONICS CO., LTD.

Wisdom Plaza, Block B, Tower 2, 18th Floor  
Qiaoxiang Road, Nanshan District, Shen Zhen,  
Guang Dong, China

T +86-755-83240988  
F +86-755-83202898

WWW.POSTEKTECHNOLOGIES.COM