

V8i

PORTABLE BARCODE LABEL PRINTER



RUGGED
PARTS
DURABLE
MACHINES
ON-SITING
PRINTING

Sturdy and strong
Perfect for outdoor
toughness printing



Standard Bluetooth
& USB Interface
Extensible Standard
Wi-Fi Connection



“Independently
Removed Ribbon”
Frees you from high
cost consumables



High endurance
battery supports
long hours' printing



ON-SITE PRINTING FOR LONG LASTING LABELS

V8i portable direct thermal/thermal transfer printer offers a tailored solution for mobile printing demands. It is designed to be light and handy, easy-to-carry, but its sturdy and strong structure can perform the diversified toughness printing under outdoor or other environments for more reliable and durable standards. Meanwhile, V8i equipped with large volume rechargeable battery; Bluetooth, Wi-Fi and USB connections are supported, which means it is flexible to be used in concert with your smart devices, and satisfy your variable demands for outdoor working.

BENEFITS

Designed to be small and portable, V8i is the finest choice for all movable printing environments, especially ideal for warehousing, transportation, base station, and medical care businesses.

Sturdy and strong, the V8i has outstanding drop resistance, and is perfect for all types of outdoor toughness printing.

Bluetooth, USB connections are supported, fulfilling the diversified printing demands.

Optional Vehicle Power Adaptor and Hand Holding Strap offer convenience, practicality and trendy.

Super high endurance battery comes with the printer, ready for long hours of outdoor working.

SPECIFICATIONS



Model	V8i
Printing Method	Thermal Transfer
Printing Resolution	203 dpi
Max Printing Speed	2 ips (50.8 mm/s)
Max Printing Width	1.89" (48 mm)
Max Printing Length	39.37" (1000 mm)
Memory	8 MB FLASH ROM, 8 MB SDRAM
Media	Width: 2.2" (56 mm) max., 0.4" (10 mm) min. OD: 3" (76.2 mm) max., ID: 1" (25.4 mm) min. Thickness: 0.0023" ~ 0.006" (0.06 ~ 0.15 mm), including liner
Ribbon	Max width: 2.0" (51 mm); Max length: 82' (25 m) OD: 1" (25.4 mm) max., ID: 0.05" (12.7 mm) min., Ink side: Out
Media Sensor	Reflective
Bar Code Types	1D Barcode: Code 39, Code 93, Code 128/subset A,B,C, Codabar, Interleave 2 of 5, UPC A/E 2 and 5 add-on, EAN-13/8/128, UCC-128; 2D Barcode: MaxiCode, PDF417, Data matrix, QR Code
Interfaces	Bluetooth V4.0 , USB Device 2.0 , Wi-Fi (extensible)
Battery	7.4V 2200mAh Li-ion rechargeable battery
Weight	1.2 kgs (including battery)
Dimensions	W 5.12" (130 mm) × D 10.3" (262 mm) × H 4.02" (102 mm)
Operating Environment	Temperature: 41°F ~ +104°F (5°C ~ 40°C) Relative humidity: 5% ~ 85% non condensing
Storage Environment	Temperature: -4°F ~ +140°F (-20°C ~ 60°C), Relative humidity: 5% ~ 85% non condensing
Optional Items	Hand Holding Strap

* All specifications are subject to change without notice.

APPLICATIONS

Telecommunication
Power Industry

...

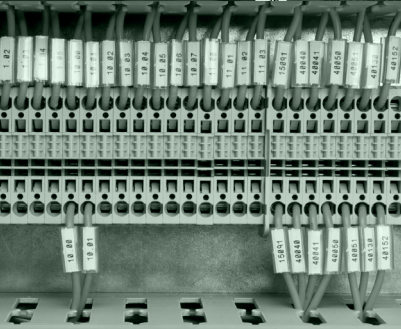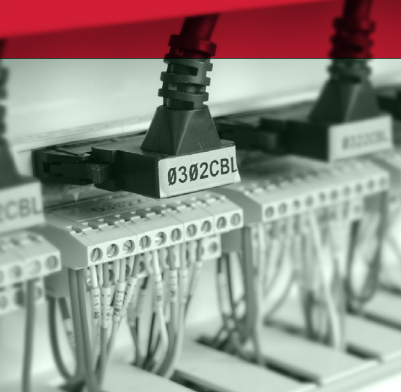

SAMPLES

ID: B60D Length: 60 M
Model: EAR-ONS52-3*4
Start: #6 court, B Setcion
End: Water Tower

POSTEK
POSTEK-ZYX-999
Postek Electronics Co., Ltd
0755-83240988

CLASS I
TRANSFORMER
MODEL NO.: MT-1234
INPUT: 120V-60Hz (RED-RED)
OUTPUT: 12V~1650mA (BLK-BLK)
POSTEK ELECTRONICS CO.,LTD.



POSTEK

POSTEK ELECTRONICS CO., LTD.

Wisdom Plaza, Block B, Tower 2, 18th Floor
Qiaoxiang Road, Nanshan District, Shen Zhen,
Guang Dong, China

T +86-755-83240988
F +86-755-83202898

WWW.POSTEKTECHNOLOGIES.COM